

Procedure 2) – See Figure 3

Start the project by building the two seat assemblies first. Both seat sections are identical except that they are built as a left and right pair, this means that pieces B & C are reversed as are the leg/arm rest assemblies (Figure 5). Follow the step by step procedure to build the seat assembly. You are using solid wood stock, so be careful of wood grain and drywall screws. You should not have pre-drilling if so, then a 5/64" drill will work for drywall screws, or use a 3/32" for #8 screws, and 7/64" for #10 screws.

Procedure 3) – See Figure 4

Now we will assemble the table/center section of the project. With the assembly of the inside leg sections as per Step #6. Use two 1-1/2" screws for the top of each piece H (one from each side). Once assembled, a temporary brace as illustrated, will be helpful. Keep the front ends of J & K even and flush, with the tops of leg/tables. The top of the table is not to be assembled; the top leg/table support is rear. Make sure the table is square as shown. Keep the tops flush, and the bottom pieces L, 5" from the floor. The ends of L are a BUTT fit to the side of H, so you will need to locate these and fasten with one 2-1/2" screw through H and into the end of L (for both locations). Fasten L & K with one 1-1/2" screw each, as well as the N & K joint.

The table top pieces are best cut and installed as indicated in Figure 4 – step 9 (and also in Procedure 1). Use one 1-1/2" screw in each end of pieces S.

Procedure 4) – See Figure 5

The outside arm/leg sections are assembled as per Figure 5. Note that the piece B is not put on at this stage as they should have already been used to construct the seat sections in Procedure 2. We have shown them only as a reference of where they are to be mounted. Once the legs are built up, again using a brace (step 11), they can be fastened to the seat assembly as we have illustrated. The outside leg/tables are not to be assembled; the pieces F and E are to be installed in reverse of each other, to create a left and right assembly.

Procedure 5) – See Exploded View and Figure 6


Assembly is completed by attaching the table section to the seat/leg sections. With the completed seat/leg sections, the assemblies with the inside leg assemblies, using the dimensions as illustrated in Figure 5 for reference. Install two 2-1/2" screws through H into pieces C, and two 1-1/2" screws through pieces J & K into pieces D, and also two 1-1/2" screws to fasten pieces E & F. Use two 2-1/2" screws to fasten pieces G & H. The top of the table is not to be assembled; the pieces F and E are to be installed in reverse of each other, to create a left and right assembly.

Procedure 6)


If you haven't done so to begin with, now is the time to finish your project with Oil or Stone. We do not recommend the use of weathering ability of paint. Once it peels, it is a big project to strip or scrop the paint, whereas Oil or Stone needs only to be re-applied. Your Tel-o-tete is now ready for use – Enjoy –

TYPICAL SEAT ASSEMBLY

FIGURE 3

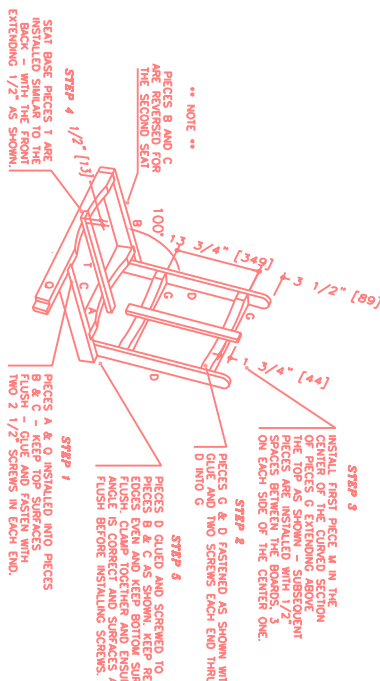


EXPLODED VIEW

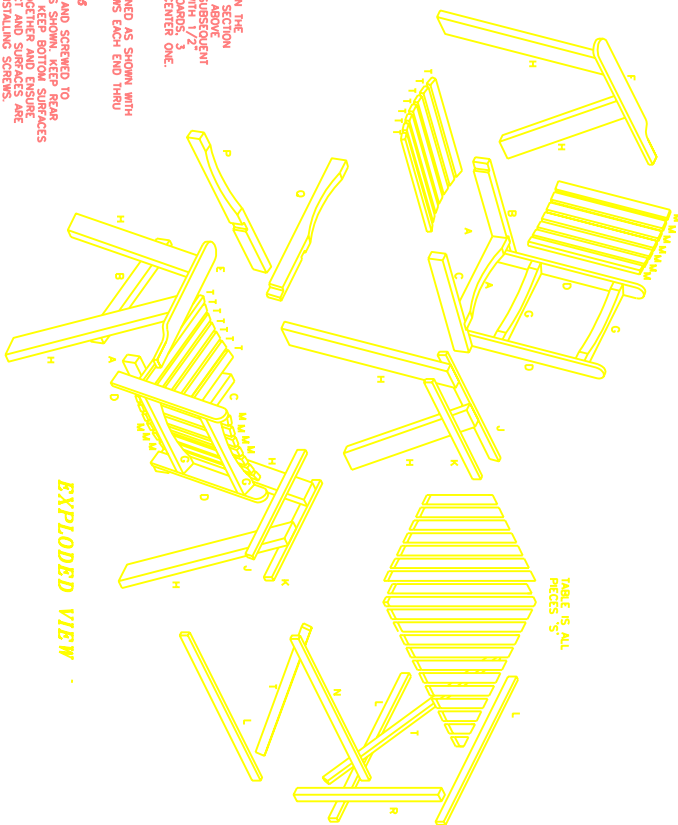


OUTSIDE ARM AND LEG ASSEMBLY

FIGURE 5

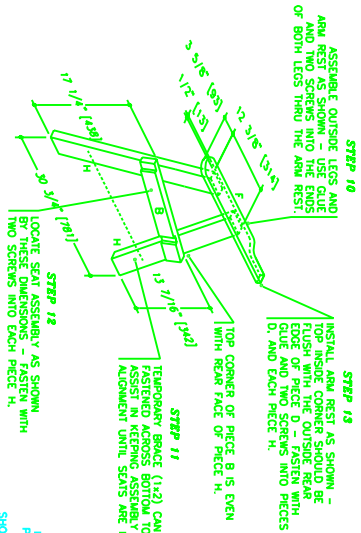

TABLE/LEG ASSEMBLY

FIGURE 4

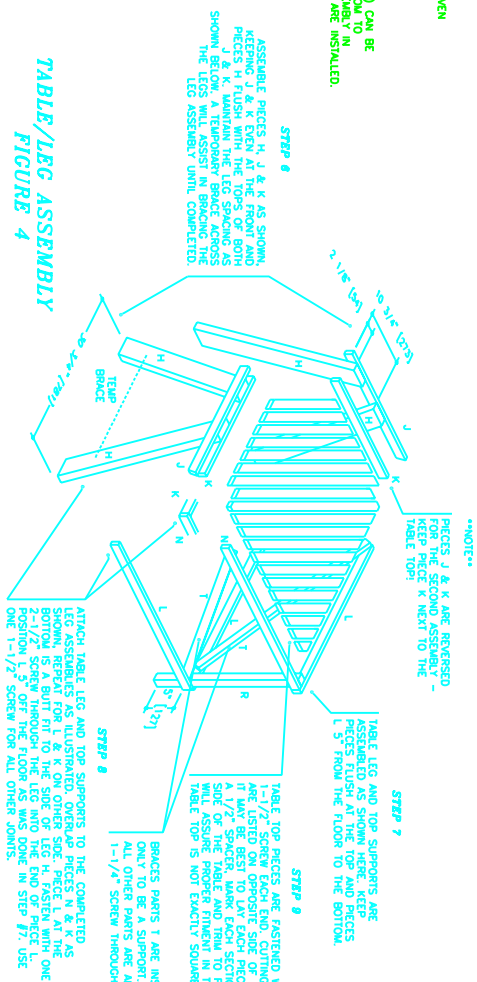

TETE-A-TETE (Corner) COMPLETED PROJECT

FIGURE 6

