

www.easwoodplans.com

NOTICE

The purchaser agrees, when purchasing this product ("the Project"), that the purchaser has acquired the right to build or construct the object or project set out in the Plan (the "Project") for his/her/its personal use only and not for resale or other commercial purposes.

1) The purchaser agrees to:

- 1) reproduction of the Plan in whole or in part by any means whatsoever is strictly prohibited.
- 2) Blueprints for the Handymon shall not be made for any other willful purpose, such as to copy the plan, the Project or any tools used to construct the Project or for any resale or damage resulting therefrom.


NOTE: Read all directions before beginning
Carpenters Glue should be used to
reinforce all joints
Set all nails and countersink all screw holes
Dimensions in brackets denote millimeters

- 1) Lay out your material on the workbench, or on sawhorses, as outlined in the materials layout (fig. 1 and 2). Draw out all parts exactly as illustrated, including the letter designations, in pencil. Ensure that the wood grain is straight and free of knots, and that the grain of the saw. Before cutting, double check all measurements to ensure they are correct. Always cut on the waste side of the line. Sand all edges, forming in a motion from the inside of the wood to the cut. Use a square to mark the cut lines. The 45 degree and cuts for pieces K and L, the long measurements are given.




Make a depth gauge for your drill – by drilling through a $\frac{3}{4}" \times \frac{3}{4}"$ piece of wood lengthwise. Cut wood to give desired depth of drill and place over drill bit.

DRILL DEPTH GAUGE ILLUSTRATION 1


ROLLING BARBEQUE CART - Project #209

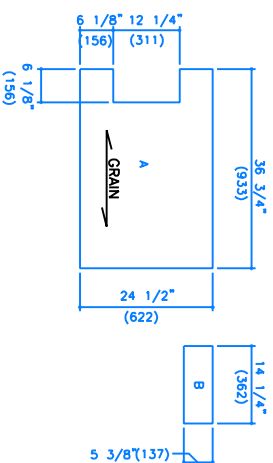

MATERIALS LAYOUT
FIGURE 1

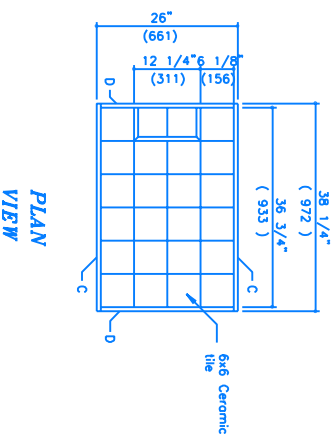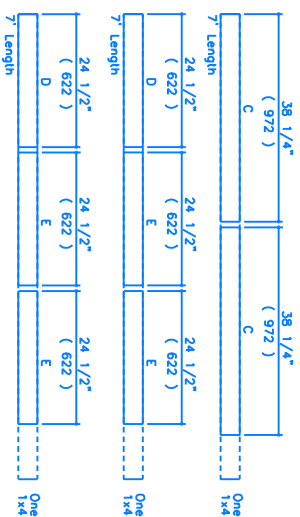

PLAN
VIEW

VIEW

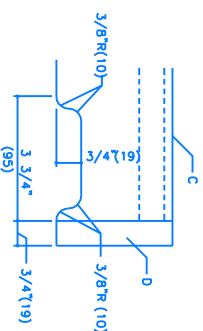


HANDLE DETAIL

FIGURE 3

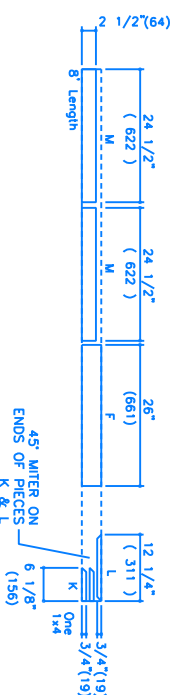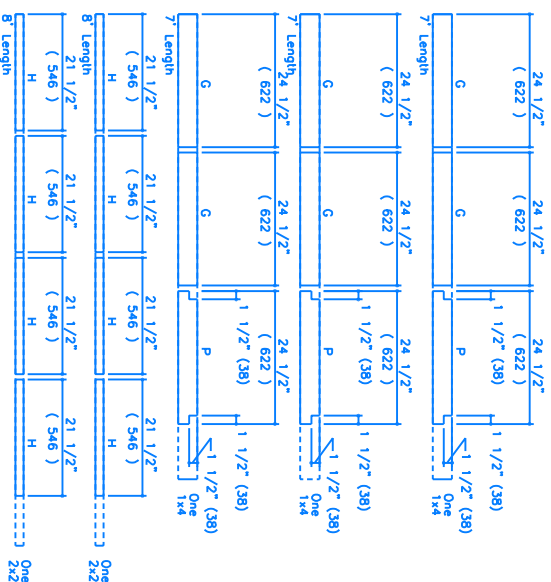

CUTTING DIAGRAM
FIGURE 2

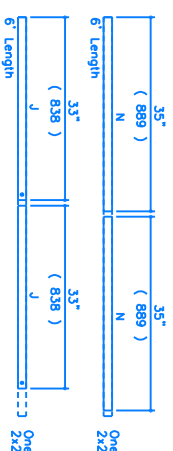

MATERIALS LIST

Approx. twenty 3" #8 flathead screws
Approx. fifty 1 1/2" #8 flathead screws
Approx. ten 1 1/4" #8 flathead screws
Approx. seventy five 2" finishing nails
Approx. seventy five 1 1/2" finishing nails
Eight 7 1x4 (3/4"x3 1/2")
One 8 1x4 (3/4"x3 1/2")

MATERIALS LIST

Two 6' 2x2 { 1 1/2"x1 1/2"
Two 8' 2x2 { 1 1/2"x1 1/2"
48"x48" sheet 3/4" Plywood, good one side
Twenty four 6"x6" Ceramic tiles
Two 6"x1 1/2" wheels (wood preferred)
23 1/2" threaded rod (1/2" dia)
Four 1/2" nuts

MATERIALS LIST

Four 1/2" washers
Carpenters Glue
Stain
Sandpaper
Glue for tiles
Tile grout