


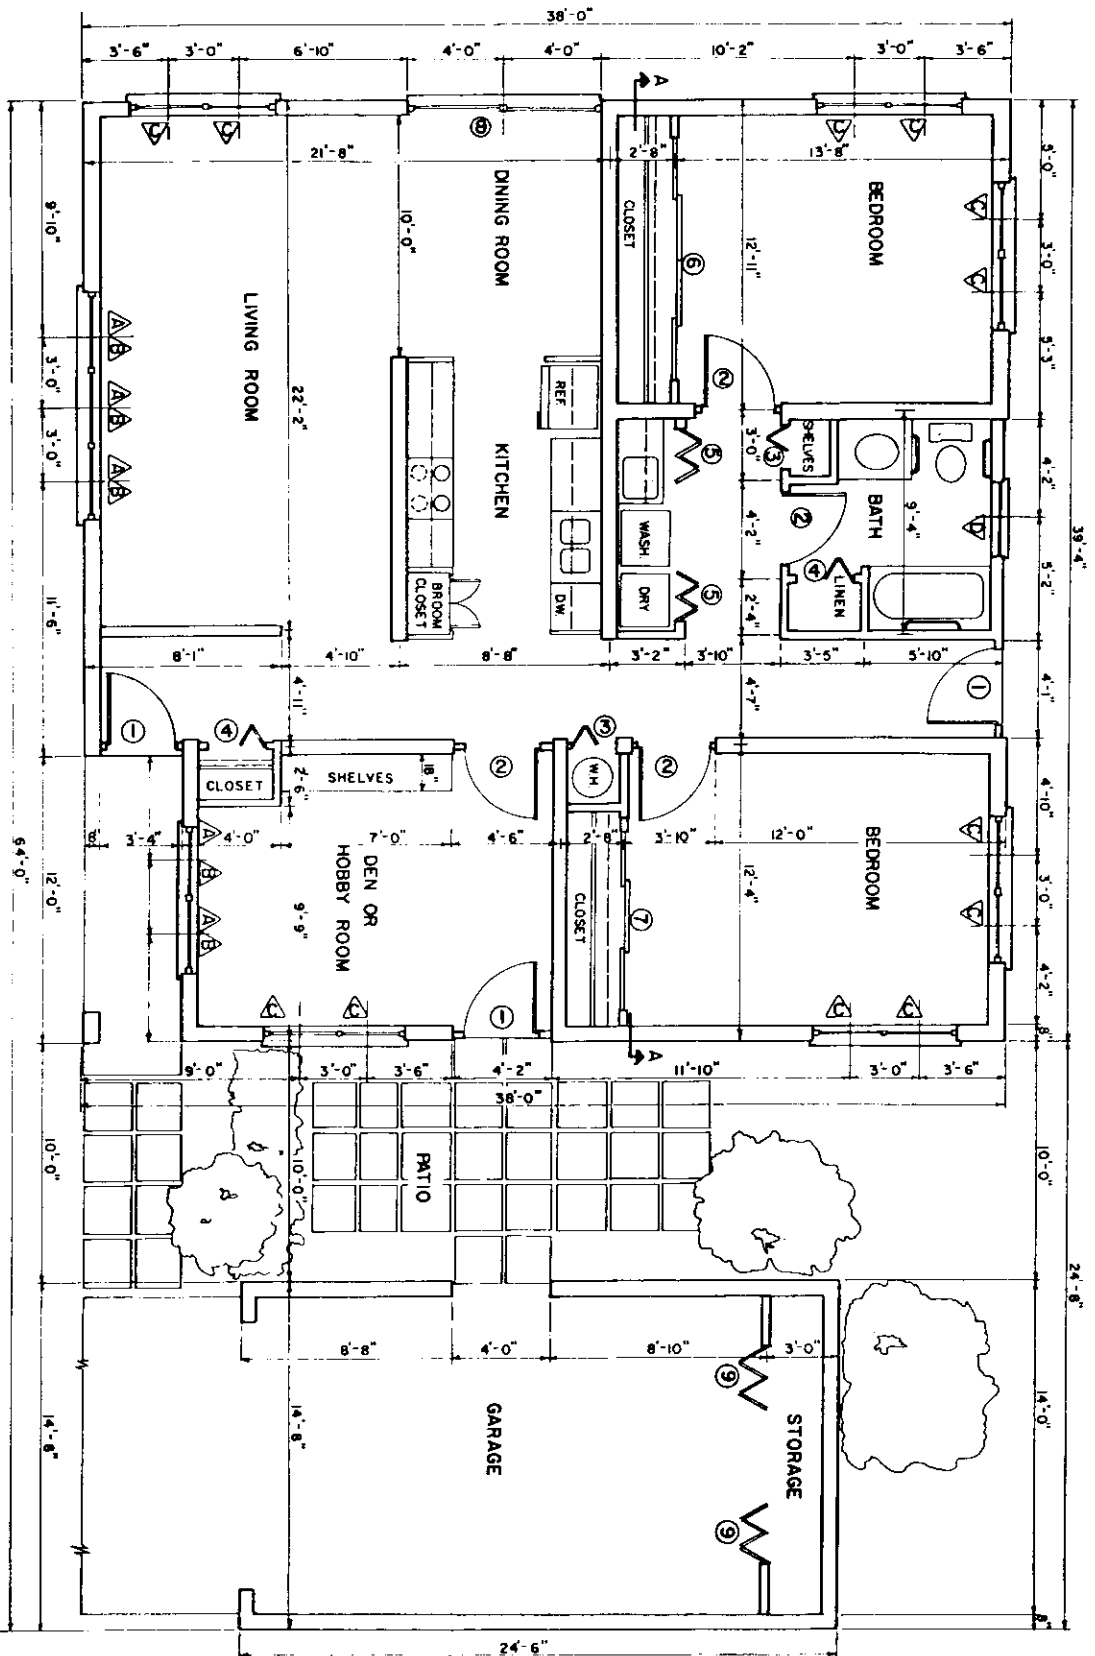

FLOOR PLAN

DOOR SCHEDULE

MARK	SIZE	TYPE	NO. REQ'D
1	3'-0" x 6'-6"	WOOD SOLID CORE EXTERIOR	3
2	3'-0" x 6'-6"	WOOD HOLLOW CORE INTERIOR	4
3	2'-0" x 6'-6"	WOOD FOLDING	2
4	2'-2" x 6'-6"	WOOD FOLDING	2
5	4'-0" x 6'-6"	WOOD SLIDING (4 PANELS)	1
6	4'-0" x 6'-6"	WOOD SLIDING (3 PANELS)	1
7	7'-6" x 6'-6"	GLASS SLIDING	1
8	7'-6" x 6'-6"	WOOD FOLDING	2
9	4'-6" x 6'-6"	WOOD FOLDING	2

WINDOW SCHEDULE


MARK	SIZE	TYPE	NO. REQ'D
A	3'-0" x 3'-0"	WOOD AWNING	3
B	3'-0" x 1'-6"	WOOD HALF-ROUND FIXED	3
C	3'-0" x 4'-6"	WOOD AWNING	12
D	3'-0" x 2'-0"	WOOD AWNING	1

Reference 7195


COOPERATIVE EXTENSION SERVICE
AGRICULTURE AND HOME ECONOMICS

UNITED STATES DEPARTMENT OF AGRICULTURE COOPERATING
AND
RETIREMENT HOUSE -
CONCRETE BLOCK CONSTRUCTION

USDA '84 7254 SHEET 1 OF 3

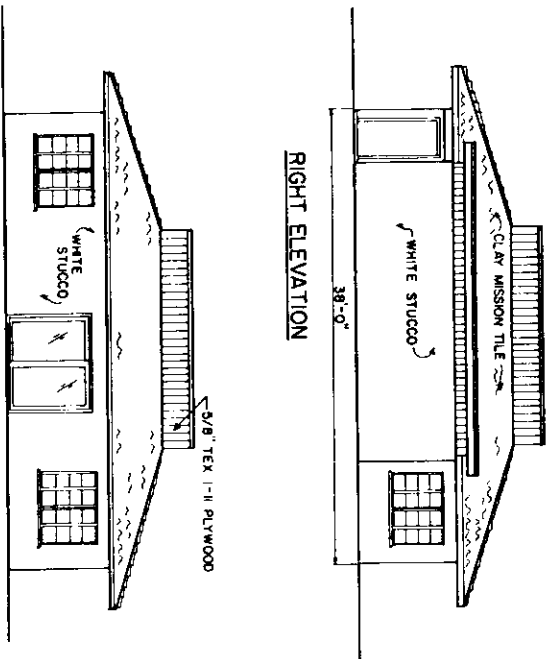


RIGHT ELEVATION

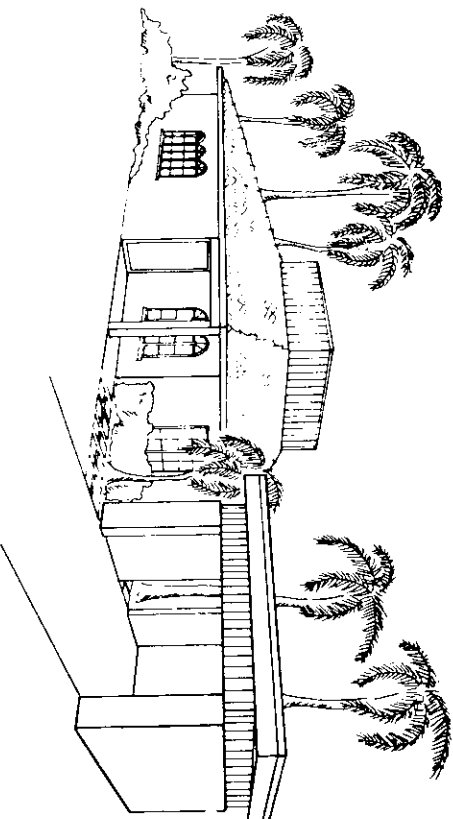


PERSPECTIVE VIEW

LEFT ELEVATION

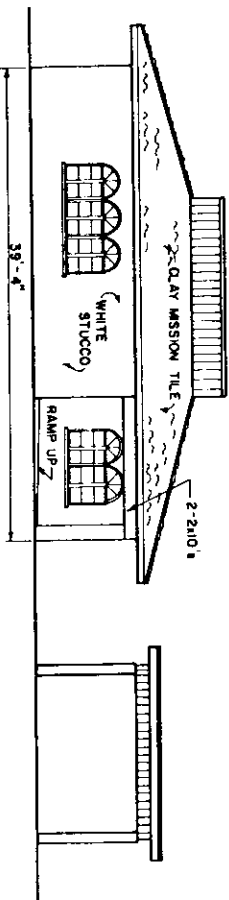

FRONT ELEVATION

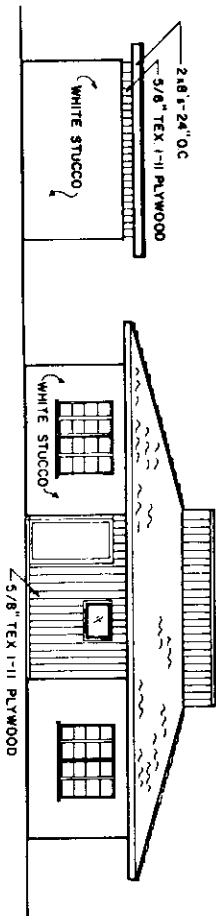

REAR ELEVATION

CONSTRUCTION CHECKLIST


1. CHECK LOCAL BUILDING CODE AND LOAN COMPANY CRITERIA (RAFTERS MEET 15 LB/FT² SNOW LOAD CRITERIA).
2. ADEQUATELY NAIL AND ANCHOR JOINTS.
3. USE EXTERIOR GLUED PLYWOOD WHENEVER IT MAY BE WETTED DURING OR AFTER CONSTRUCTION.
4. PRESSURE TREAT ALL WOOD WITH GROUND CONTACT AND PROVIDE OTHER NEEDED TERMITE CONTROL.
5. R VALUES DEPEND ON LOCAL CLIMATE AND FUEL COST.
6. PROVIDE 1 SQ FT OF ATTIC VENT OPENINGS FOR EACH 150 SQ FT OF CEILING.
7. WEATHERIZE ALL OPENINGS AND JOINTS.

COOPERATIVE EXTENSION SERVICE
AGRICULTURE AND HOME ECONOMICS


UNITED STATES DEPARTMENT OF AGRICULTURE COOPERATING
AND
RETIREMENT HOUSE -
CONCRETE BLOCK CONSTRUCTION

USDA 84 7254 SHEET 2 OF 3


Revised 1/195

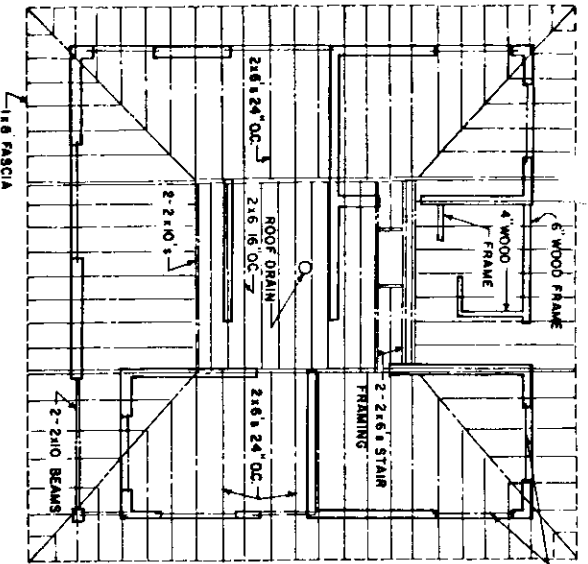


ROOF FRAMING PLAN
1/2\"/>

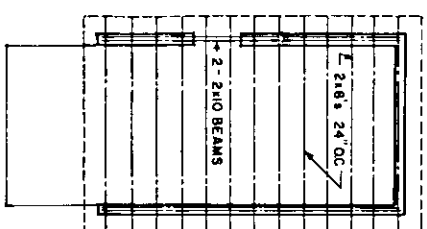


PRECAST CONCRETE LINTELS
OVER ALL WINDOWS

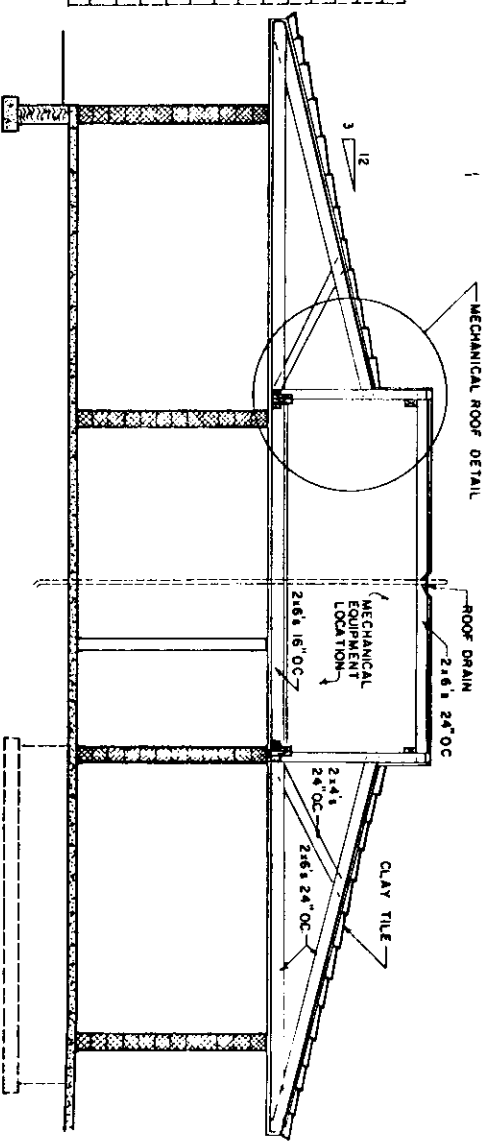


SECTION A-A
1/2\"/>

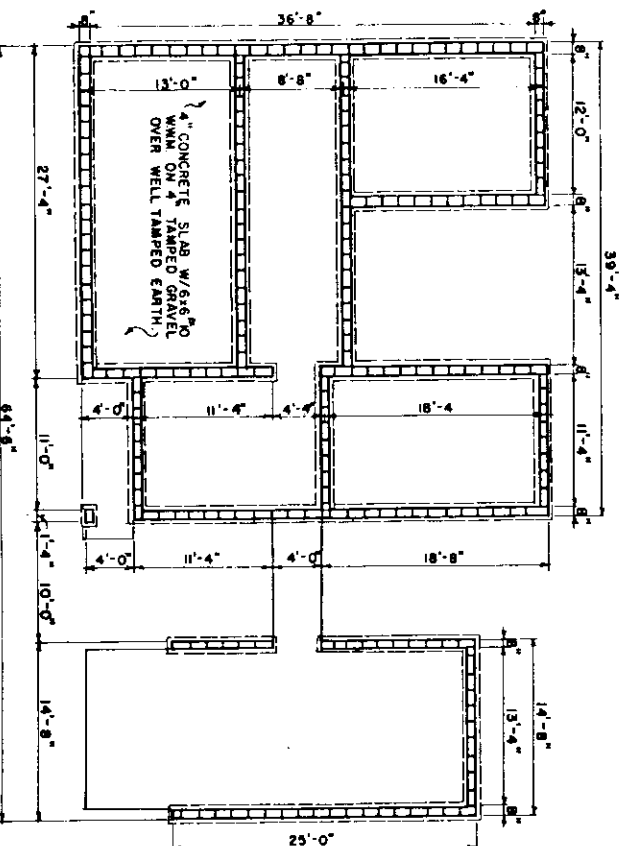

FOUNDATION PLAN
1/2\"/>

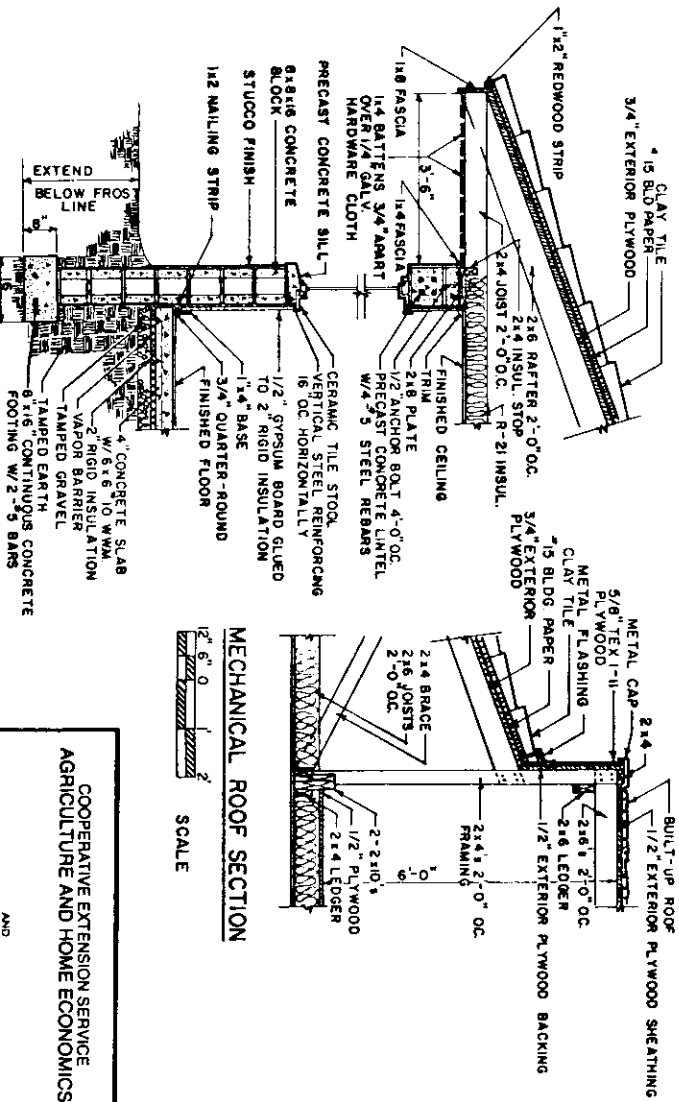

TYPICAL WALL SECTION
1/2\"/>

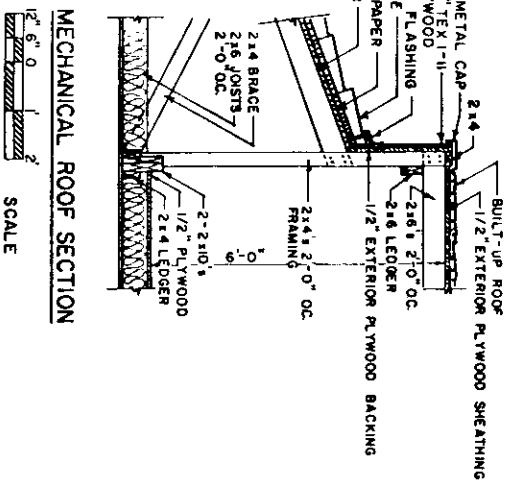

MECHANICAL ROOF SECTION
1/2\"/>