


$\frac{1}{2}$ " - 16 NC - 2 x 1 $\frac{1}{2}$ " HEX BOLT & NUT




NOTE:
PARTS WITH ANGLE CUTS ARE TORCH
CUT TO FIT

TOP VIEW

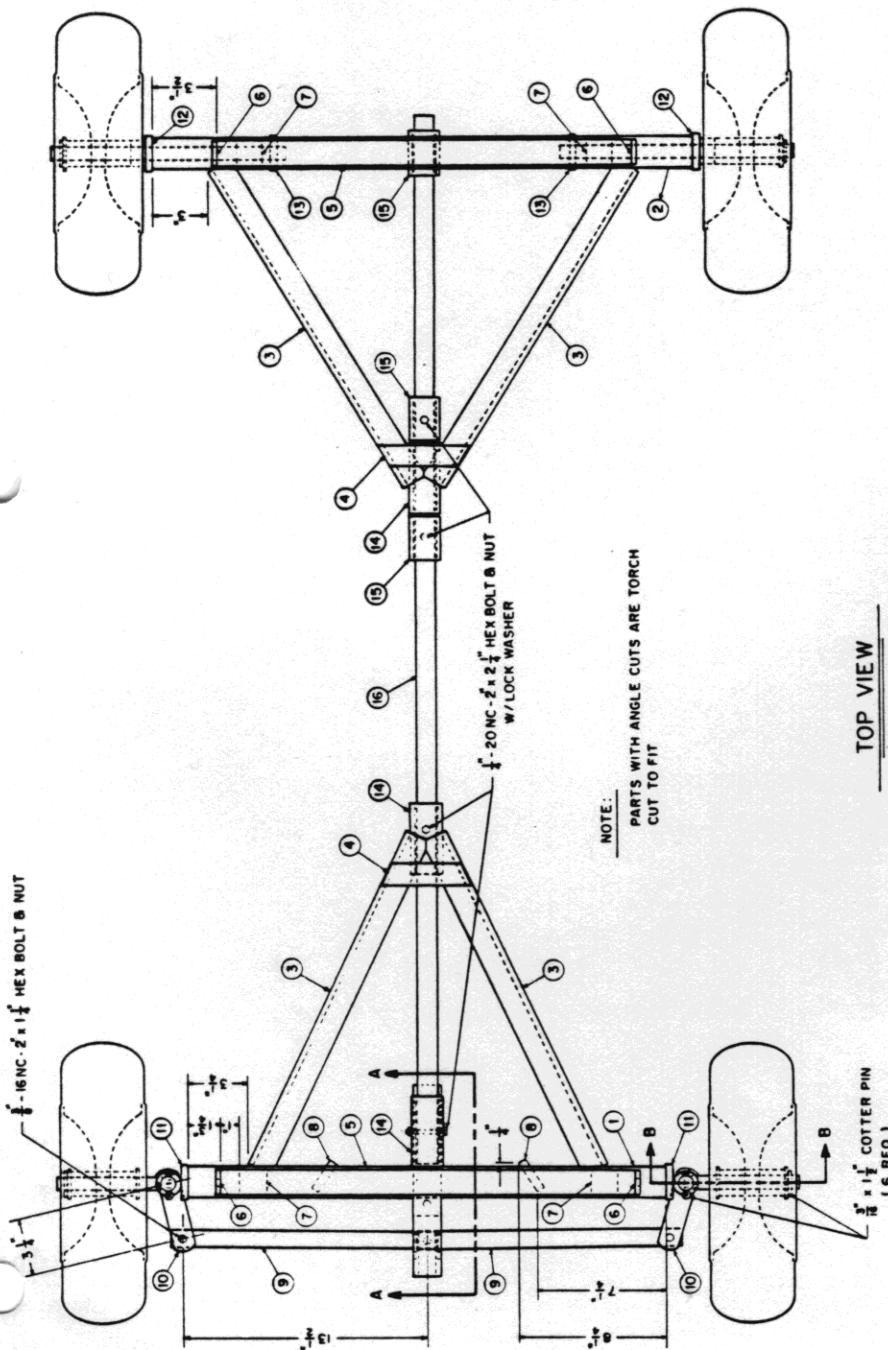

4 80/4.00 x 8 TIRE
8" RIM W/ $\frac{1}{2}$ " BRASS BUSHING

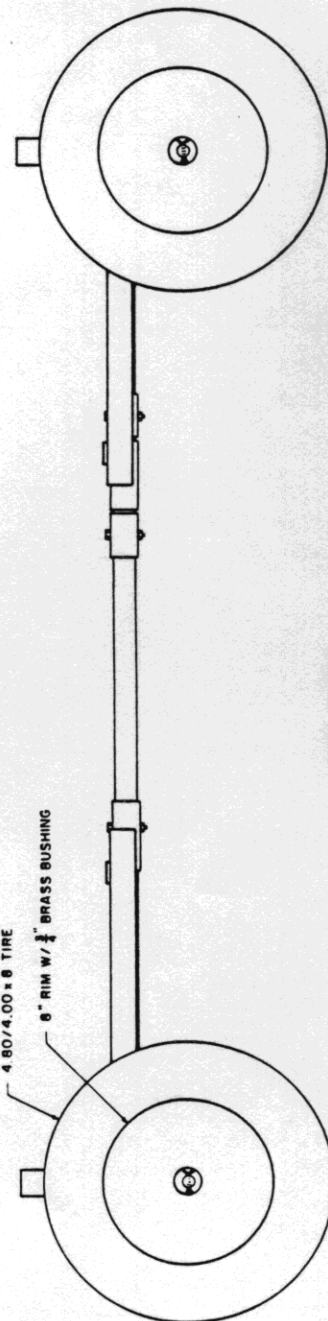

SIDE VIEW




PT. NO.	MATERIAL	QUAN.
1	$\frac{1}{2}$ " x $\frac{1}{2}$ " x $\frac{1}{2}$ " x 26' SQ. STEEL TUBING	1
2	$\frac{1}{2}$ " x $\frac{1}{2}$ " x $\frac{1}{2}$ " x 30' SQ. STEEL TUBING	1
3	$\frac{1}{2}$ " x $\frac{1}{2}$ " x $\frac{1}{2}$ " x 21' L-STEEL	4
4	$\frac{1}{2}$ " x $\frac{1}{2}$ " x 5" STRAP STEEL	2
5	$\frac{1}{2}$ " x $\frac{1}{2}$ " x 23" STRAP STEEL	2
6	$\frac{1}{2}$ " x $\frac{1}{2}$ " x 5" STRAP STEEL	4
7	$\frac{1}{2}$ " x $\frac{1}{2}$ " x $\frac{1}{2}$ " STRAP STEEL	12
8	$\frac{1}{2}$ " x $\frac{1}{2}$ " x 2" SQ. STEEL	2
9	$\frac{1}{2}$ " x $\frac{1}{2}$ " x 15" STRAP STEEL	2
10	$\frac{1}{2}$ " x $\frac{1}{2}$ " x 5" STRAP STEEL	2
11	$\frac{1}{2}$ " x 2" x 2 $\frac{1}{2}$ " STRAP STEEL	2
12	$\frac{1}{2}$ " x 2" x 5 $\frac{1}{2}$ " STRAP STEEL	2
13	$\frac{1}{2}$ " x 2" x 3 $\frac{1}{2}$ " STRAP STEEL	2
14	$\frac{1}{2}$ " PIPE - 4" LONG	3
15	$\frac{1}{2}$ " PIPE - 2 $\frac{1}{2}$ " LONG	2
16	1" PIPE - 60" LONG	1
17	$\frac{1}{2}$ " x $\frac{1}{2}$ " x 6" STRAP STEEL	2
18	$\frac{1}{2}$ " x $\frac{1}{2}$ " x 6 $\frac{1}{2}$ " STRAP STEEL	2
19	$\frac{1}{2}$ " x $\frac{1}{2}$ " x $\frac{1}{2}$ " x 30" SQ. STEEL TUBING	1
20	$\frac{1}{2}$ " x $\frac{1}{2}$ " x 6 $\frac{1}{2}$ " STRAP STEEL	1
21	$\frac{1}{2}$ " x $\frac{1}{2}$ " x 2 $\frac{1}{2}$ " STRAP STEEL	2
22	$\frac{1}{2}$ " x 2 $\frac{1}{2}$ " x 2 $\frac{1}{2}$ " STEEL PLATE	2
23	$\frac{1}{2}$ " x $\frac{1}{2}$ " x 11" STRAP STEEL	1
24	$\frac{1}{2}$ " DIA x 3" LG. COLD ROLLED - DRILL FOR $\frac{1}{2}$ " DIA. COLD ROLLED STEEL	2

COOPERATIVE EXTENSION SERVICE
AGRICULTURE AND HOME ECONOMICS


UNITED STATES DEPARTMENT OF AGRICULTURE COOPERATING

4-WHEEL LAWN & GARDEN TRAILER


WV '84 6358 SHEET 1 OF 2

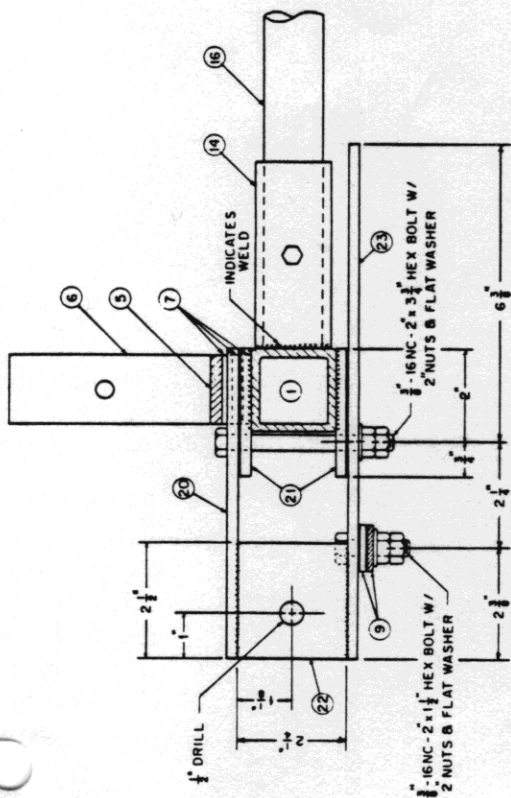


SECTION A-A

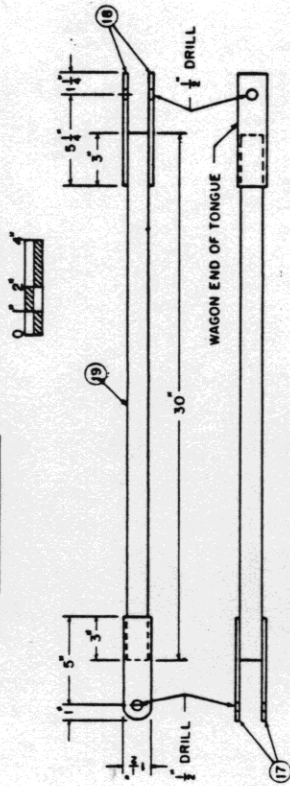

TONGUE DETAILS

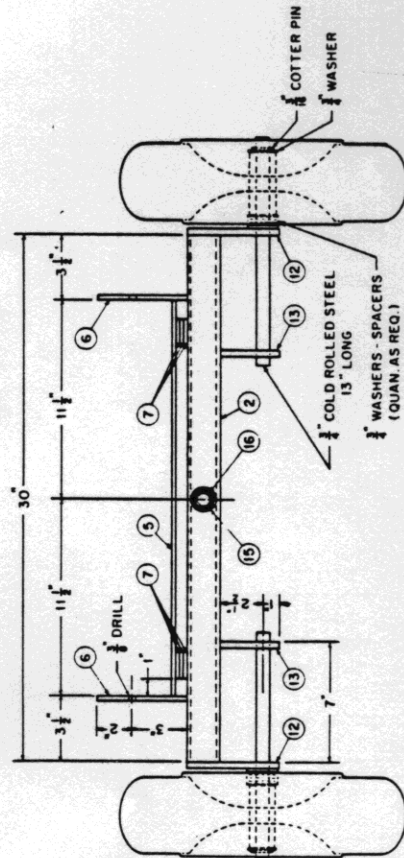

REAR VIEW

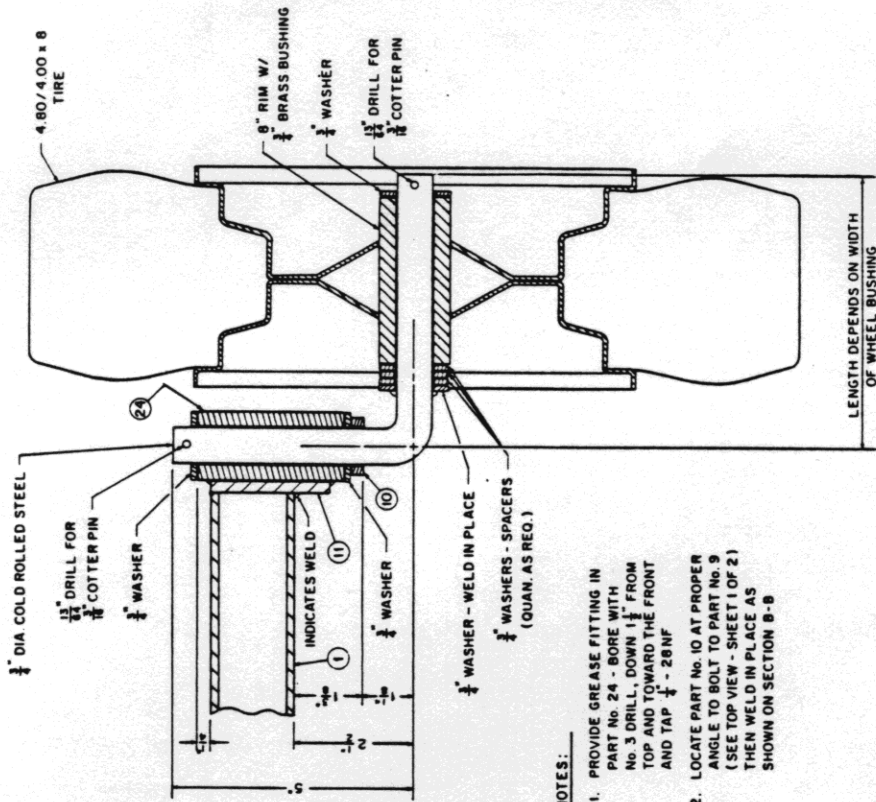

SECTION B-B

NOTES:

1. PROVIDE GREASE FITTING IN PART No. 24 - BORE WITH No. 3 DRILL, DOWN 1 1/2\"/>
2. LOCATE PART No. 10 AT PROPER ANGLE TO BOLT TO PART No. 9 (SEE TOP VIEW - SHEET 1 OF 2) THEN WELD IN PLACE AS SHOWN ON SECTION B-B