



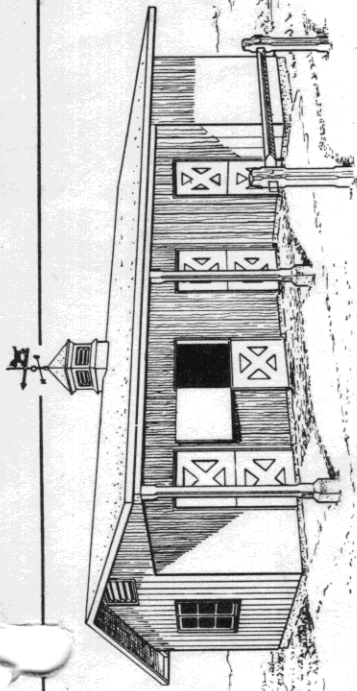


PERSPECTIVE

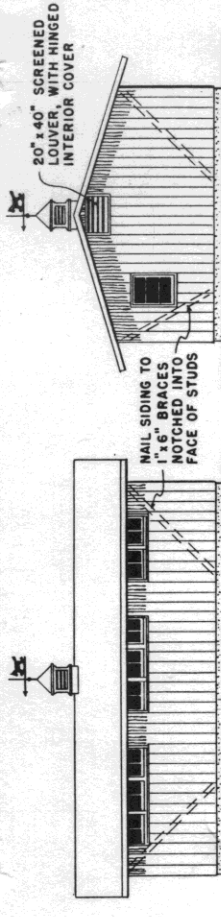


REAR ELEVATION
SCALE: 1/8"=1'-0"

RIGHT END ELEVATION
SCALE: 1/8"=1'-0"

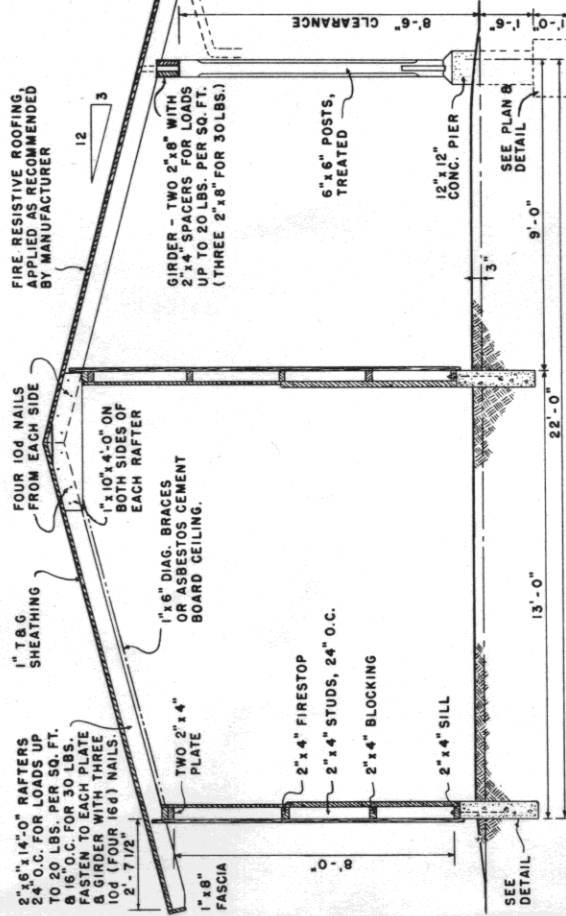


TYPICAL CROSS SECTION A-A
SCALE: 3/8"=1'-0"

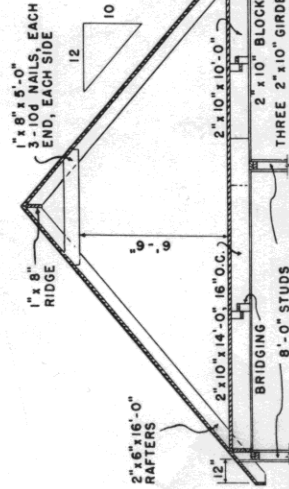

ALTERNATE ROOF
SCALE: 1/4"=1'-0"

THIS STEEPLY PITCHED ROOF PROVIDES NOW SPACE FOR STORAGE OF ADDITIONAL FEED. SO IS RECOMMENDED FOR USE WHEN NEEDED TO CONFORM TO THE APPEARANCE OF NEARBY BUILDINGS.

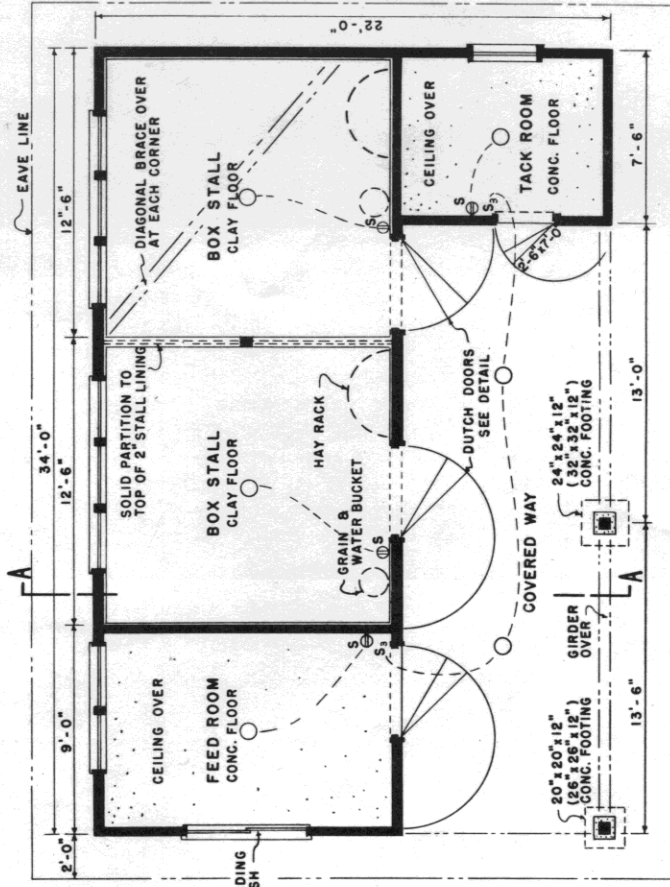


PLAN
SCALE: 1/4"=1'-0"

GENERAL NOTES:

- THIS BUILDING IS DESIGNED FOR USE IN AREAS WHERE SNOW LOADS DOES NOT EXCEED 30 POUNDS PER SQUARE FOOT AND WIND DOES NOT EXCEED 108 MPH.
- FOR AREAS WHERE THE SNOW LOAD DOES NOT EXCEED 20 LBS. PER SQ. FT., SPACE RAFTERS 24" O.C., USE THE TWO 2"x8" GIRDER.
- FOR SNOW LOADS UP TO 30 LBS. PER SQ. FT., SPACE RAFTERS 16" O.C. AND USE A THREE 2"x8" GIRDER.
- REGARDLESS OF SNOW LOAD, IF THE AREA IS SUBJECT TO WINDS OF HURRICANE FORCE, OVER 76 MPH, USE THE THREE 2"x8" GIRDER AND THE FASTENINGS AND PIER FOOTINGS SHOWN IN PARENTHESIS (---)
- STALL WINDOWS: USE THREE SASH, AS SHOWN
MODERATE " " " ONE
COLD " " " TWO
- FOUNDATION WALLS AND PIER FOOTINGS MUST BE DEEP ENOUGH TO BEAR ON SOLID GROUND, BELOW FROST LINE.


NOTE:

IF MOW IS USED, THE SMALLER ROOM AT RIGHT, MAY BE USED FOR FEED STORAGE. THE SMALLER ROOM AT LEFT FOR TACK AND BUNK ROOM.

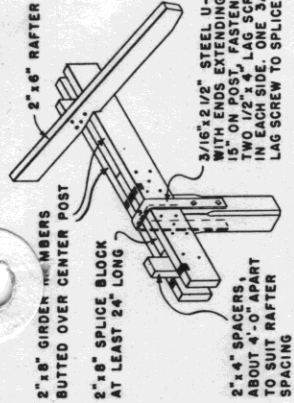


POST, GIRDER & RAFTER DETAIL





THE THREE PART GIRDER IS SIMILAR EXCEPT THE CENTER MEMBER JOINT SHALL BE 16" TO 30" FROM CENTER POST.

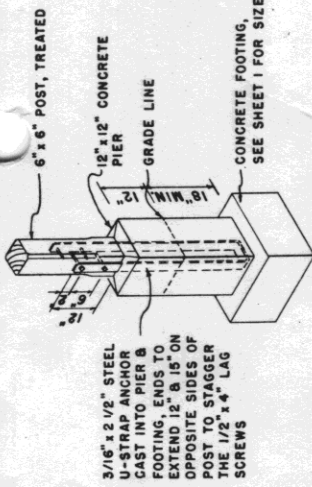


FOOTING, PIER & POST DETAIL

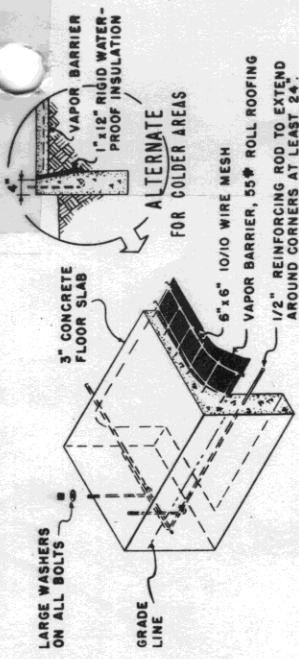

FOUNDATION & FLOOR DETAIL AT CORNER FOR FEED & TACK ROOMS

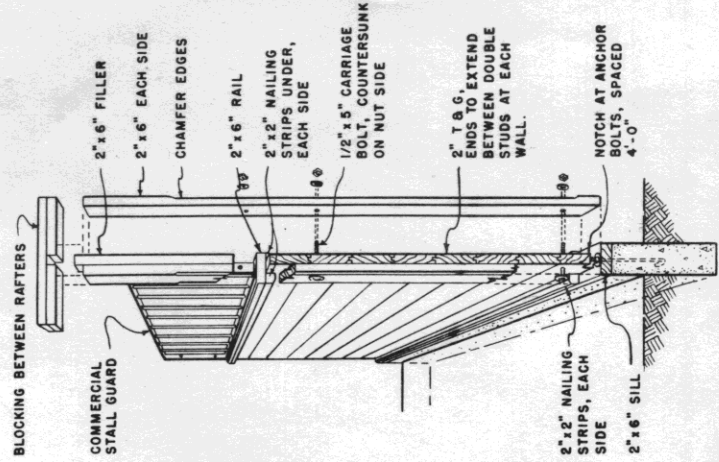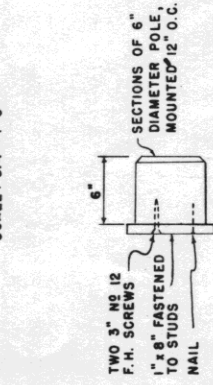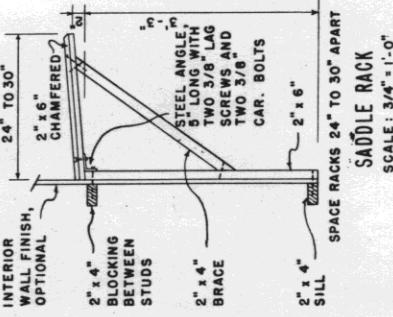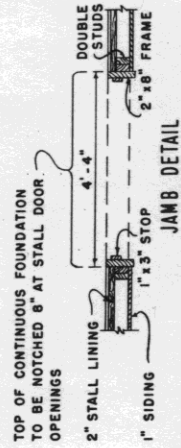


CUTAWAY SECTION STALL PARTITION

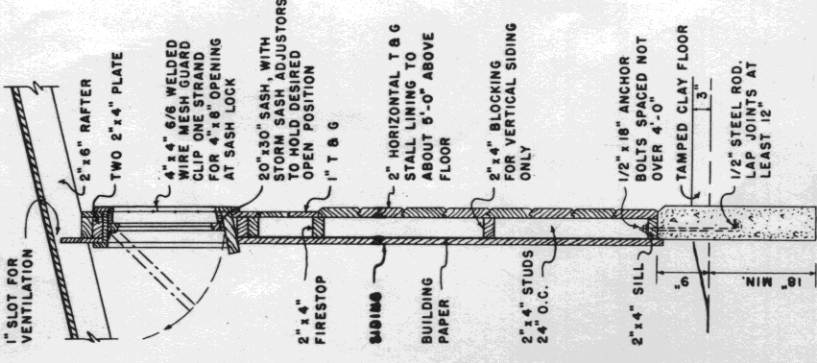


FOUNDATION, WALL & STALL WINDOW DETAIL

SCALE: 3/4" = 1'-0"

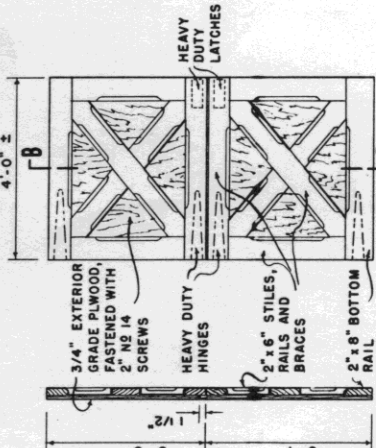

SECTION B-B STALL DOOR DETAILS

SCALE: 1/2" = 1'-0"

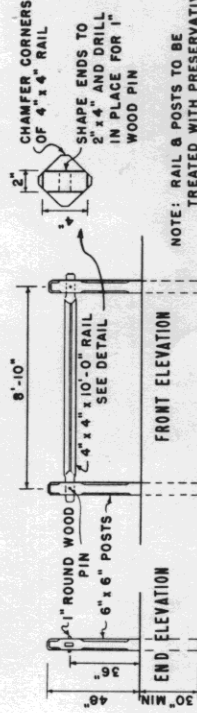

HITCHING RAIL

SCALE: 1/4" = 1'-0"