



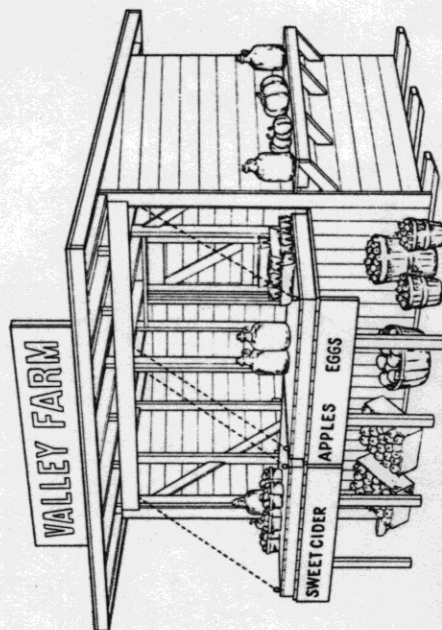

Scale: 1/2" = 1'-0"

- NOTES: 1 Skids & shoes to be treated with creosote or other preservative.
- 2 Siding & flooring to be nailed to all diagonal braces notched in to face of studs & top of skids.
- 3 When in use, see that site is level, or block up skids as reqd.
- 4 Price board to be held in closed position with hooks and eyes located at each end of board.
- 5 Metal straps may be used to secure four rafters to the ribbon in place of the 2"x2" cleats shown.



PERSPECTIVE

5. Chains to be secured to counter with eye-bolts and to sides of rafters with hooks. Provide additional hooks on the same rafters toward rear wall and located so that chains will hold each counter section in a closed position.