



NOTE 1:


IN SOME AREAS IT MIGHT BE DESIRABLE TO CLOSE IN BETWEEN THE EXTERIOR SIDING AND THE GIRDERS ON THE NORTH AND WEST EXPOSURES

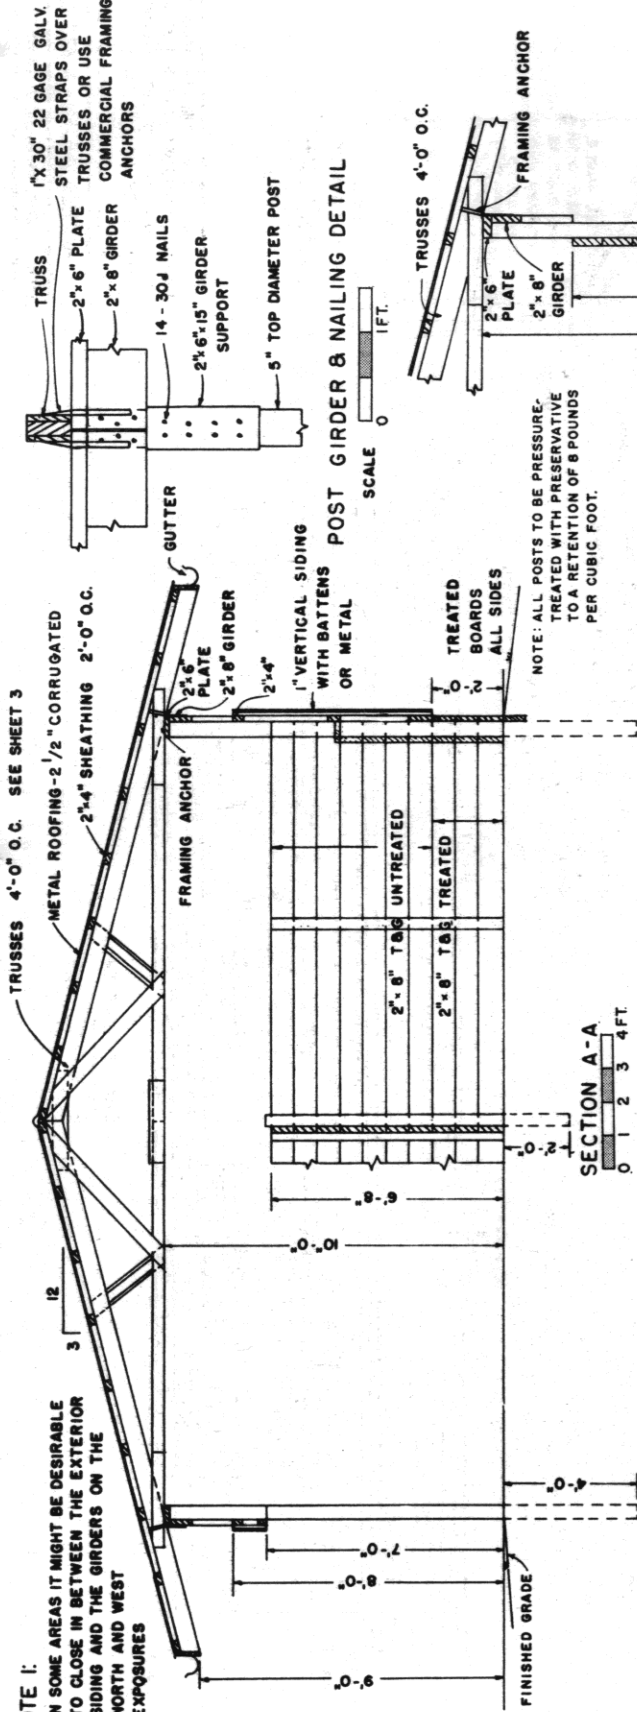


NOTE: ALL POSTS TO BE PRESURE-TREATED WITH PRESERVATIVE TO A RETENTION OF 8 POUNDS PER CUBIC FOOT.

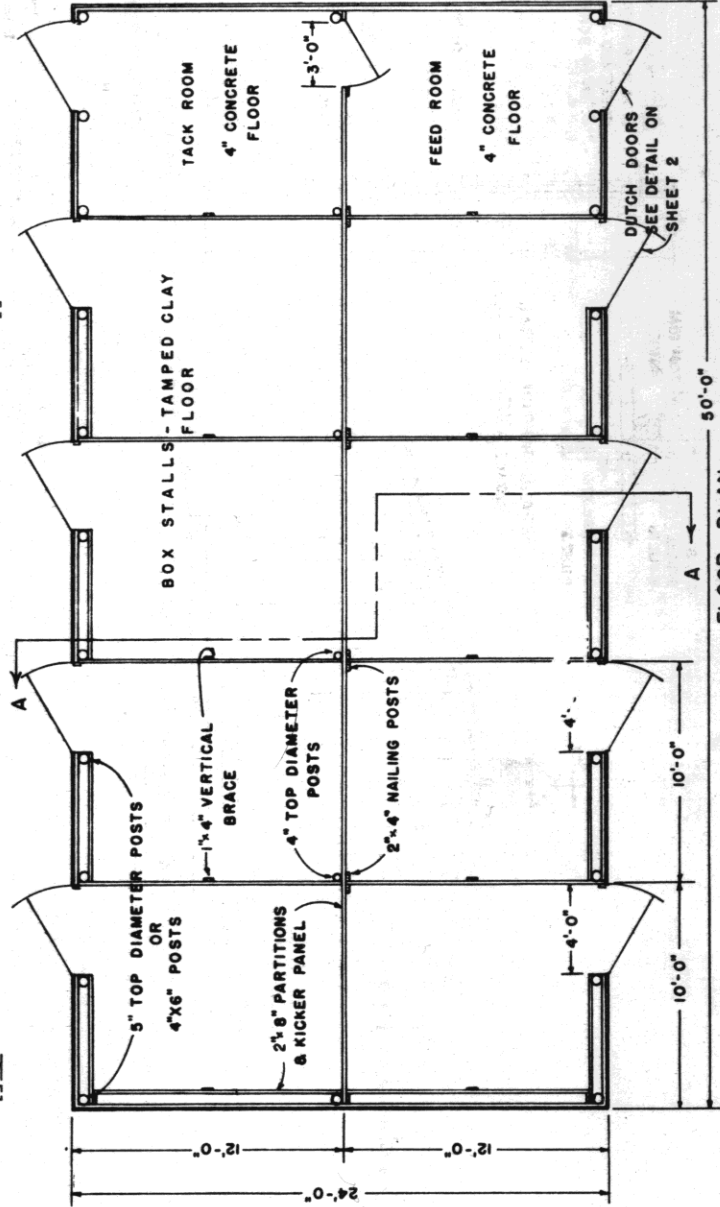


ALTERNATE WALL SECTION





STALL PARTITION DETAIL
SCALE 0 2 FT.

3/4" EXTERIOR GRADE PLYWOOD FASTENED WITH 2" #14 SCREWS




HEAVY DUTY HINGES
2" x 6" STILES RAILS AND BRACES
2" x 8" BOTTOM RAIL


SECTION B-B

STALL DOOR DETAILS
SCALE 0 2 FT.

ELEVATION

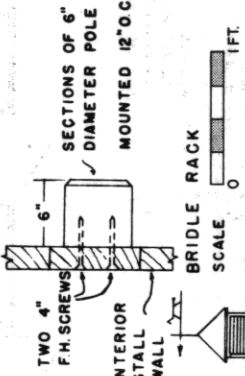




BRIDLE RACK
SCALE 0 1 FT.

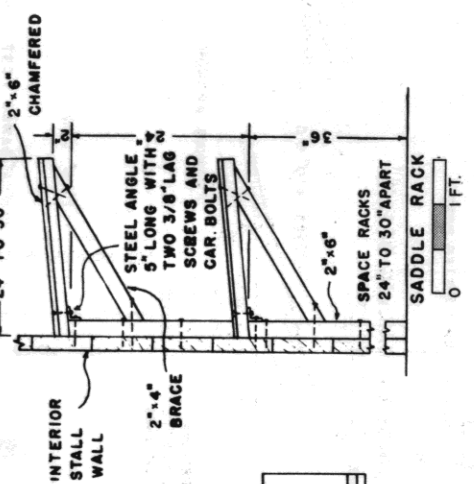

SEE NOTE 1 ON SHEET 1.

SIDE ELEVATION
SCALE 0 2 4 6 FT.

5, 9" J NAILS FROM BACK
1, 9" J NAIL FROM FRONT
6" - 5"
10" - 3 1/8"
12"
2" x 6" RAFTER
1" x 6" DIAGONAL
2" x 4" DIAGONAL
2" x 4" DIAGONALS TO BE IN GOOD BEARING TO PROVIDE OPTIMUM RIGIDITY
RAFTER JOINT
(FROM BACK OF ASSEMBLY)

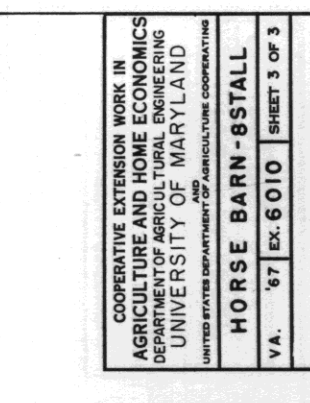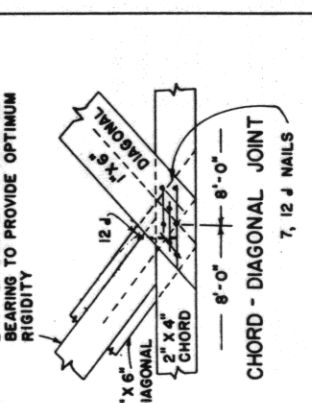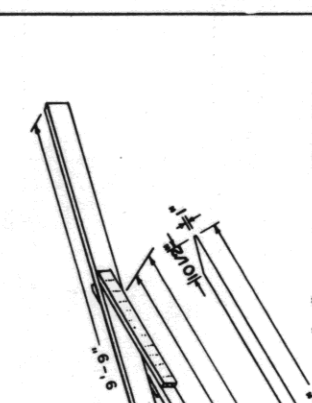

BILL OF MATERIALS

RAFTERS	2 POS.	2" X 6" X 18'
CHORDS	2 PCS.	2" X 4" X 12'
DIAGONALS	2 POS.	1" X 6" X 10'
	1 PCS.	2" X 4" X 6'
SPLICES	4 POS.	1" X 4" X 3'
	3 POS.	1" X 6" X 3'
NAILS		BRIGHT HARDENED
	140 PCS.	- 12 J 3 1/4" X 148"
		3 1/4" X 135"
	38 PCS.	- 6 J 2 1/2" X 135"
		2 1/2" X 120"

3'-6"

5/8"

24'-0" ON BOTH SIDES

OUTSIDE TO OUTSIDE OF PLATE

ES:

HELICALLY THREADED NAILS
PERMANENTLY TIGHT, RIGID JOINTS
THROUGHOUT STRUCTURE

HARDENED NAILS IN DRY SOUTHERN PINE
TEMPLATES FOR ALL NAILS TO ASSURE
MAXIMUM EFFICIENCY AND EFFECTIVENESS

USE ALL NAILS FROM FRONT EXCEPT
THOSE SHOWN AS (O)

1" x 6" SPLICE PLATES
ON BOTH SIDES

16, 12# NAILS

2" x 4" CHORD

30"

CENTER-SPLICE JOINT

NOT
USE
FOR
THRU
USE
USE
MAXI
DRIV
THO