



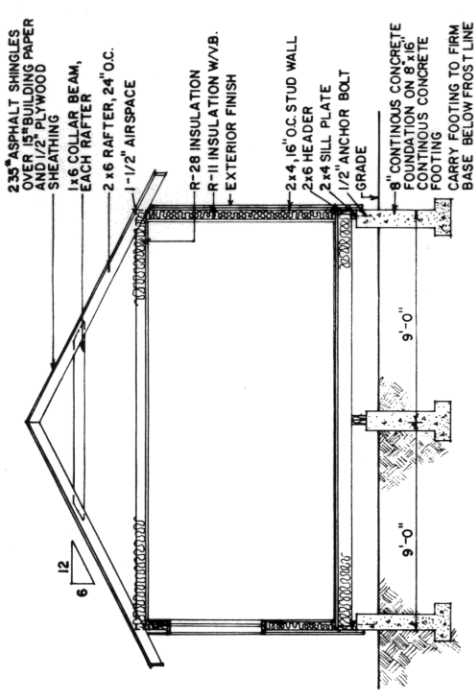

SECTION

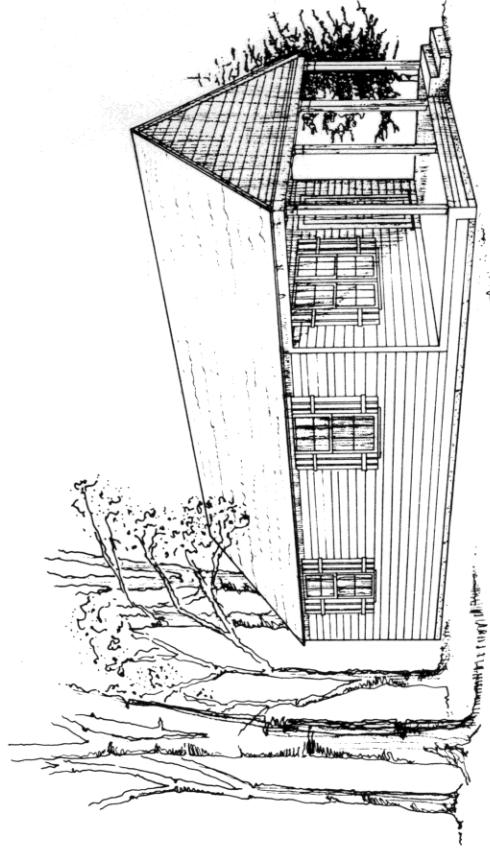

PERSPECTIVE (NO SCALE)

ALTERNATIVE:

AN 8" THICK MASONRY PERIMETER FOUNDATION COULD BE USED IN PLACE OF POST AND BEAM CONSTRUCTION OR A THICKENED EDGE SLAB CAN BE USED BUT EDGE INSULATION SHOULD BE PROVIDED AROUND PERIMETER OF SLAB TO REDUCE HEAT LOSS AND REDUCE THE POTENTIAL FROST UPLIFT PROBLEM.


A THROUGH-THE-WALL ELECTRIC HEATING (A.C. UNIT IS SUGGESTED IF ATTIC SPACE IS USED FOR HEATER. LOCATE IT ABOVE BATH. WATER HEATER COULD BE UNDER VANITY COUNTER AT ONE END OF CLOSET OR IN AN ADD-ON SHED SHELTER AT REAR.

CONSTRUCTION CHECKLIST


- CHECK LOCAL BUILDING CODES CRITERIA.
- ADEQUATELY NAIL AND ANCHOR JOINTS.
- USE EXTERIOR GLUED PLYWOOD WHEREVER IT MAY BE WEIETED DURING OR AFTER CONSTRUCTION.
- PRESSURE TREAT ALL WOOD WITH GROUND CONTACT AND PROVIDE OTHER NEEDED TERMITE CONTROL.
- PROVIDE 1 SQ. FT. OF ATTIC VENT OPENINGS FOR EACH 150 SQ. FT. OF CEILING. PROVIDE THE SAME AMOUNT OF VENTILATION FOR CRAWL SPACE.
- WEATHERIZE ALL OPENINGS AND JOINTS.

DOOR SCHEDULE		
MARK	SIZE	DESCRIPTION
1	3'0" x 6'8"	WOOD SOLID CORE EXTERIOR
2	2'8" x 6'8"	WOOD HOLLOW CORE INTERIOR
3	3'0" x 6'8"	WOOD HOLLOW CORE SLIDING

WINDOW SCHEDULE		
MARK	SIZE	DESCRIPTION
A	2'8" x 4'6"	WOOD DOUBLE HUNG

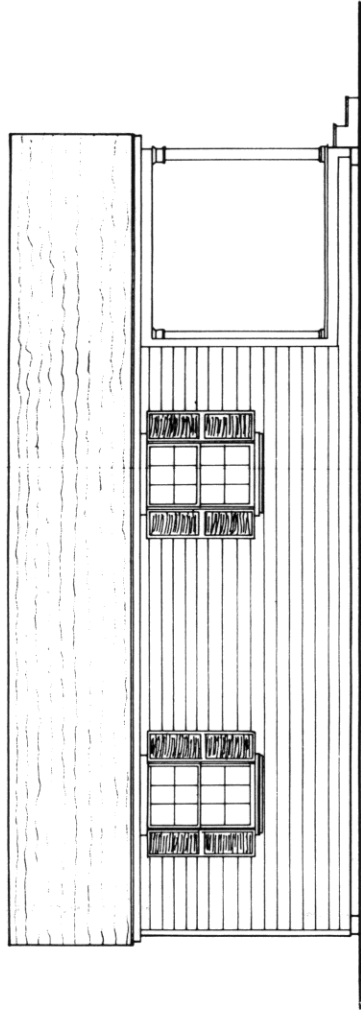

SIDE ELEVATION

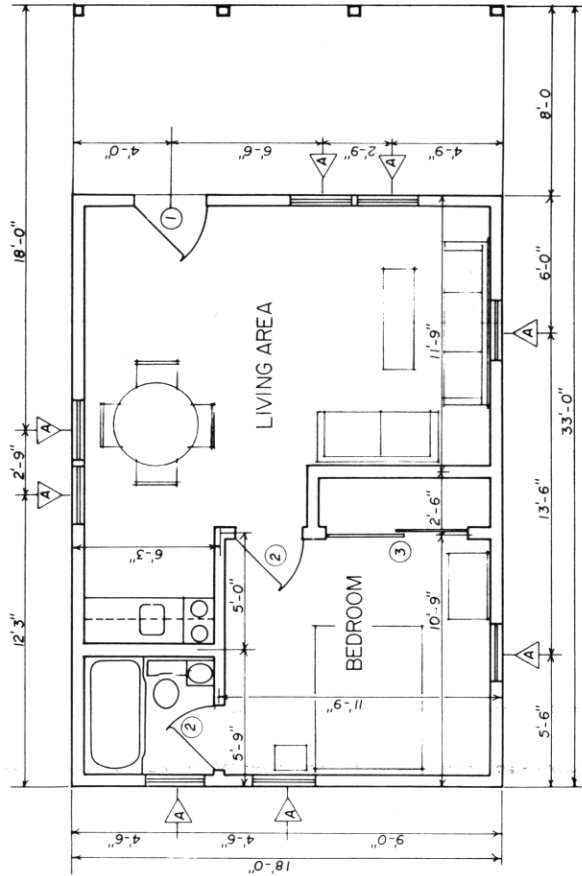

FLOOR PLAN

COOPERATIVE EXTENSION SERVICE
AGRICULTURE AND HOME ECONOMICS

UNITED STATES DEPARTMENT OF AGRICULTURE COOPERATING

DETACHED GUEST HOUSE

USDA 48 5185 SHEET 1 OF 1

REV '87