



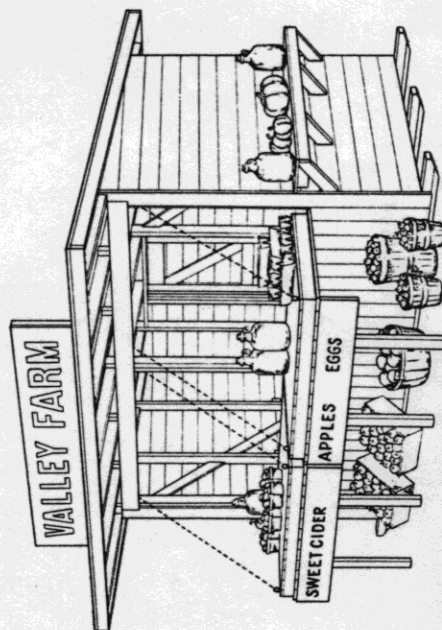

NOTES: 1. Skids & shoes to be treated with creosote or other preservative.

2. Siding & flooring to be nailed to all diagonal braces notched in to face of studs & top of skids.

3. When in use, see that site is level, or block up skids as req'd.



PERSPECTIVE

6. Chains to be secured to counter with eye-bolts and to sides of ratters with hooks. Provide additional hooks on the same ratters toward rear wall and located so that chains will hold each counter section in a closed position.