




LEFT SIDE ELEVATION

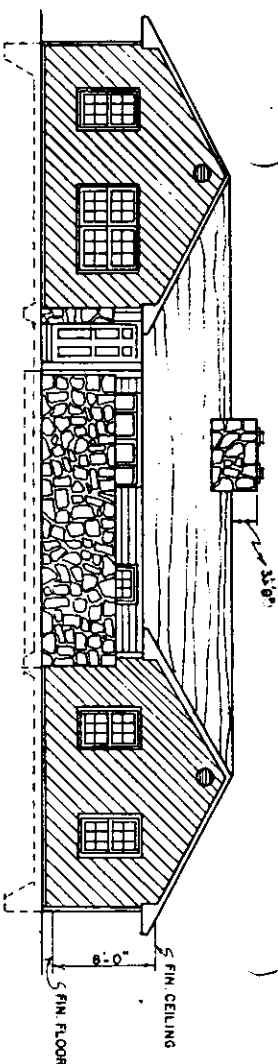

FRONT ELEVATION

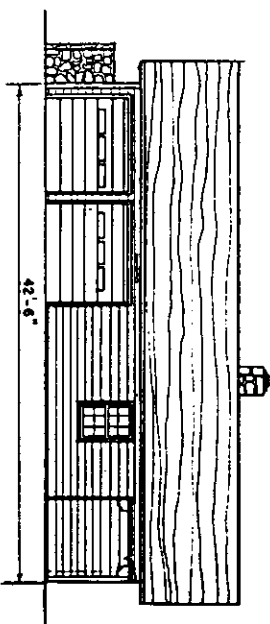


RIGHT SIDE ELEVATION

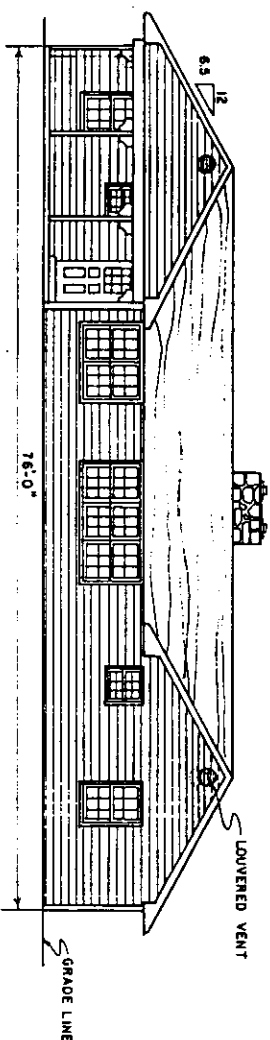

REAR ELEVATION



SCALE 1/8" = 1'-0"

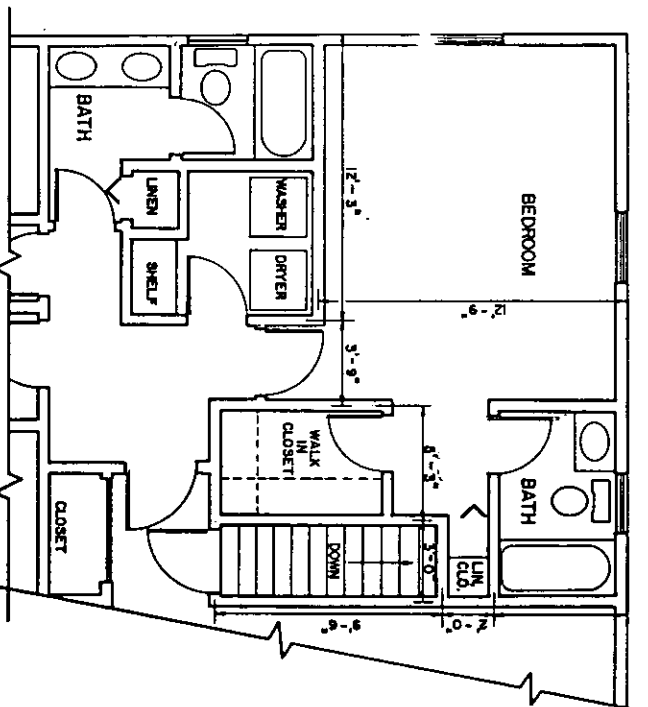

ALTERNATE PLAN (W/BASEMENT)

-REQUIRES FOUNDATION AND DOOR SCHEDULE CHANGES




SCALE 1/4" = 1'-0"

CONSTRUCTION CHECK LIST

1. CHECK LOCAL BUILDING CODE AND LOAN COMPANY CRITERIA. PURCHASE TRUSSES TO MEET LOCAL SNOW LOAD CRITERIA.
2. ADEQUATELY NAIL AND ANCHOR JOINTS.
3. SHEATH CORNERS WITH 1/2" PLYWOOD OR HIGH DENSITY FIBERBOARD OR USE DIAGONAL BRACING.
4. USE EXTERIOR GRADED PLYWOOD WHEREVER IT MAY BE WETTED DURING OR AFTER CONSTRUCTION.
5. PRESSURE TREAT ALL WOOD WITH GROUND CONTACT AND PROVIDE OTHER NEEDED TERMITTE CONTROL.
6. R VALUES DEPEND ON LOCAL CLIMATE AND FUEL COSTS.
7. PROVIDE 1 SQ. FT OF ATTIC VENT OPENINGS FOR EACH 150 SQ FT OF CEILING.
8. WEATHERIZE ALL OPENINGS AND JOINTS.
9. THIS HOUSE IS DESIGNED FOR WARM CLIMATE. COLD CLIMATE WILL REQUIRE FLOOR PERIMETER INSULATION AND HEATING DUCTS FOR SLAB FLOOR, OR A BASEMENT (SEE ALTERNATIVE PLAN FOR LOCATION OF BASEMENT STAIRS).

FOOTING UNDER LOAD BEARING WALL



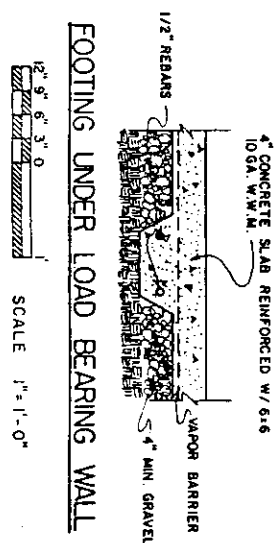


COOPERATIVE EXTENSION SERVICE
AGRICULTURE AND HOME ECONOMICS

UNITED STATES DEPARTMENT OF AGRICULTURE COOPERATING

4 BEDROOM HOUSE W/GARDEN ENTRY

MISS '87 7269 SHEET 2 OF 3



D O O R S C H E D U L E			
MARK	SIZE	DESCRIPTION	FREQ
1	3'0" x 6'8"	SOLID EXTERIOR	2
2	3'0" x 6'8"	HOLLOW INTERIOR	1
3	2'8" x 6'8"	HOLLOW INTERIOR	7
4	2'6" x 6'8"	HOLLOW INTERIOR	4
5	2'8" x 6'8"	HOLLOW EXT. SLIDING	2
6	4'6" x 6'8"	HOLLOW SLIDING	1
7	6'0" x 6'8"	HOLLOW SLIDING	1
8	3'0" x 6'8"	BI-FOLD	1
9	2'0" x 6'8"	BI-FOLD	1

COOPERATIVE EXTENSION SERVICE
AGRICULTURE AND HOME ECONOMICS

AND
UNITED STATES DEPARTMENT OF AGRICULTURE COOPERATING

4 BEDROOM HOUSE W/ GARDEN ENTRY

MISS. '87	7269	SHEET 3 OF 3
-----------	------	--------------