



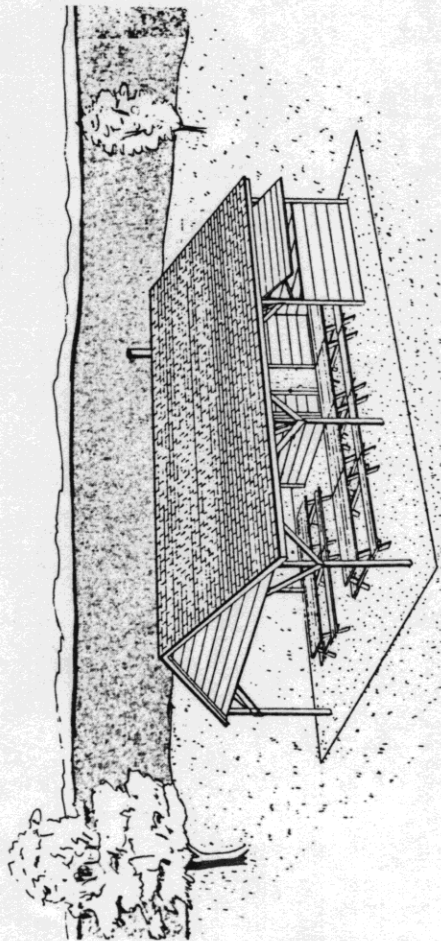

PERSPECTIVE

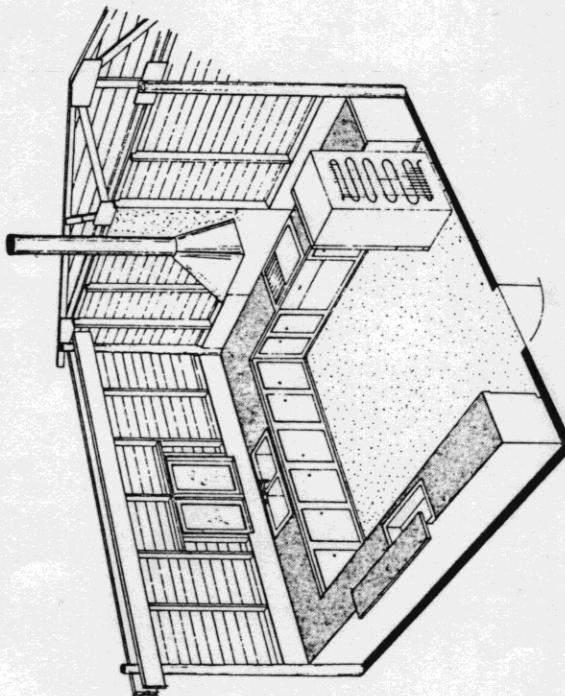

KITCHEN - CUTAWAY VIEW

NOTE:

1. ALL WOODEN MEMBERS IN CONTACT WITH GROUND SHALL BE PRESERVATIVE PRESSURE TREATED (P.P.T.)
2. SIDEWALL CONSTRUCTION DETAILS FOR HORIZONTAL SIDING ARE SHOWN, FOR VERTICAL SIDING USE TYPICAL POLE BUILDING SIDEWALL CONSTRUCTION.
3. PROVISIONS SHOULD BE MADE FOR SHUTTING OFF WATER AND DRAINING ALL LINES IN PAVILION.



DESIGNED BY:
H. R. DAVIS
E. W. FOSS
W. W. IRISH
CORNELL UNIV. PLAN NO. 830



* LENGTH OF BLDG. MAY BE EXTENDED IN 12' UNITS.

COOPERATIVE EXTENSION WORK IN
AGRICULTURE AND HOME ECONOMICS
DEPARTMENT OF AGRICULTURAL ENGINEERING
UNIVERSITY OF MARYLAND
AND
UNITED STATES DEPARTMENT OF AGRICULTURE COOPERATING


PAVILION WITH KITCHEN

N.Y. '69 6079 SHEET 1 OF 2

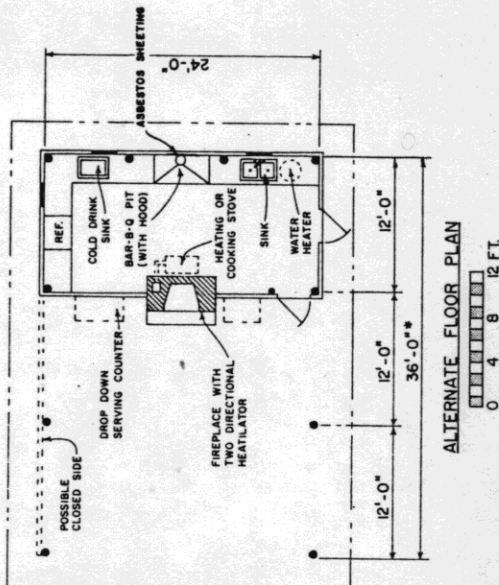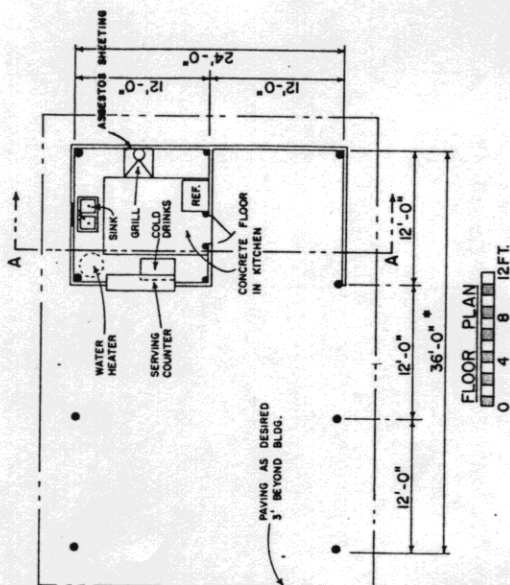

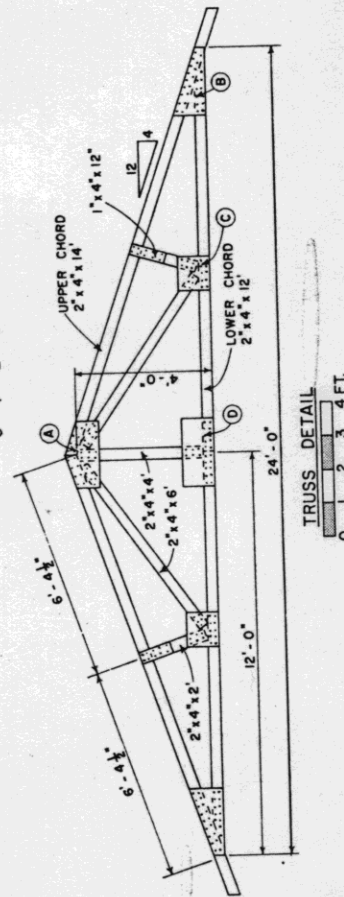

1. ALL GUSSET PLATES ARE GLUED & NAILED ON BOTH SIDES OF TRUSS. USE RESORCINOL GLUE & 6d BOX NAILS.
2. TRUSS DESIGNED FOR LOADS OF 30 P.S.F. AT 2'-0" O.C.
3. ALL LUMBER SHALL BE STRESS GRADED TO PROVIDE 1500 P.S.I. FIBER STRESS IN BENDING & 1350 P.S.I. IN COMPRESSION.



3" EXTERIOR DOUGLAS FIR PLYWOOD